

MDrive[®] Plus

MDI•34 CANopen

Product overview

MDrive[®] Plus CANopen products integrate 1.8° 2-phase stepper motor, motion controller, drive electronics and optional encoder. Products support CiA DS301 and DSP402 Device Profile for Drives and Motion Control.

Firmware is provided for setup and testing MDrive Plus CANopen products. CANopen Tester software and communication dongle (MD-CC500-000) are also available.


Application areas

MDrive Plus products deliver reliable performance for new and existing motion control applications. Satisfying the requirements for a wide range of machine builders.

Simplify your machine design and reduce cabinet size by replacing multiple components with a single compact integrated motor. Fewer individual

system components eliminates multiple potential failure points, and lowers risk of electrical noise by eliminating cabling between motor and drive.

These compact, powerful and cost effective motion control solutions deliver exceptional smoothness and performance that can reduce system cost, design and assembly time for a large range of 2-phase stepper motor applications.

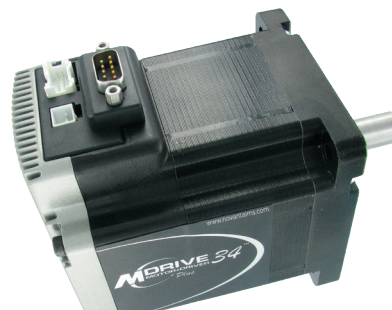

MDrive Plus MDI•34 CANopen products: integrated NEMA34 motor and controls, IP20-rated

General features

Compact integrated microstepping drive, motion controller and NEMA34 1.8° 2-phase stepper motor

Advanced current control for exceptional performance and smoothness

+12 up to +75 VDC single supply

20 microstep resolutions up to 51,200 steps per rev including: Degrees, Metric, Arc Minutes

Auxiliary logic power supply input

0 to 5 MHz step clock rate selectable in 0.59 Hz increments

Up to 8 I/O lines

One 10 bit selectable analog input

Communication CANopen

Protection IP20 rating

Thermal temp warning, over voltage/current

Programmable Motor run/hold current

Available options Motor stack lengths

Encoders

Rear control knob for manual positioning

Graphical user interface provided for quick and easy parameter setup

MDrive Plus

MDI•34 CANopen

Specifications

Communication	Type	CANopen CiA DS301 (V3.0), DSP402 (V2.0), 2.0B active			
	Baud rate	Configurable 5 KB to 1 Mb			
	ID	11 and/or 29 bit			
	Isolation	Galvanic			
	Features	Node guarding, heartbeat, SDOs, PDOs (variable mapping)			
Input power	Voltage	VDC	+12...+75		
	Current maximum (1)	Amp	4.0		
Motor	Frame size	NEMA	34		
		inches	3.4		
		mm	85		
	Holding torque	oz-in	408...1090		
		N-cm	288 ... 770		
Length	stack sizes	1, 2 & 3			
Thermal	Operating temp non-condensing	Heat sink maximum	75°C		
		Motor maximum	90°C		
Protection	Type	IP rating	IP20		
		Temp warning	Thermal, over voltage/current		
		I/O warnings	Over temp, short circuit, transient, over voltage, inductive clamp		
Auxiliary logic input	Voltage range	+12 to +24 VDC When input voltage is removed, maintains power only to control and feedback circuits.			
Analog input	Resolution	10 bit			
	Voltage range	0 to +5 VDC, 0 to +10 VDC, 0-20 mA, 4-20 mA			
General purpose I/O	Output sinking current	Up to 600 mA			
	Number	8 or 4 (2)			
	Type	Sourcing or sinking outputs/inputs			
	Logic range	Sourcing outputs +12 to +24 VDC, inputs and sinking outputs tolerant to +24 VDC, inputs TTL level compatible			
Motion	Open loop configuration	Number of settings	20		
		Steps per revolution	200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)		
	Counters	Type	Position, encoder / 32 bit		
		Edge rate maximum	5 MHz		
	Velocity	Range	+/- 5,000,000 steps per second		
		Resolution	0.5961 steps per second		
	Accel/Decel	Range	1.5 to 10 ⁹ steps per second ²		
		Resolution	90.9 steps per second ²		
	Electronic gearing external clock in (3)	Range	0.001 to 2.000		
		Resolution	32 bit		
		Threshold	TTL		
	High speed I/O	Position capture	Input filter range 50 nS to 12.9 μS (10 MHz to 38.8 kHz)		
			Resolution	32 bit	
		Trip output	Speed	150 nS	
			Resolution	32 bit	
Threshold			TTL		
Position feedback	Optional	Remote encoder interface required			
Software	Setup parameters	Storable to nonvolatile memory			
	Transmit PDOs	3 dynamically mappable			
	Receive PDOs	3 dynamically mappable			
	Manufacturer specific objects	I/O configuration, run/hold current			
	Modes of operation	Profile position, homing mode, profile velocity			
	Input functions	General purpose, homing mode profiles			
	Output functions	General purpose			

(1) Actual power supply current will depend on voltage and load.

(2) I/O is reduced from 8 to 4 for products with remote encoder option.

(3) Adjusting the microstep resolution can increase the range.


MDrive Plus

MDI•34 CANopen

Dimensions


MDI•34 CANopen NEMA34 motor, IP20-rated

inches (mm)

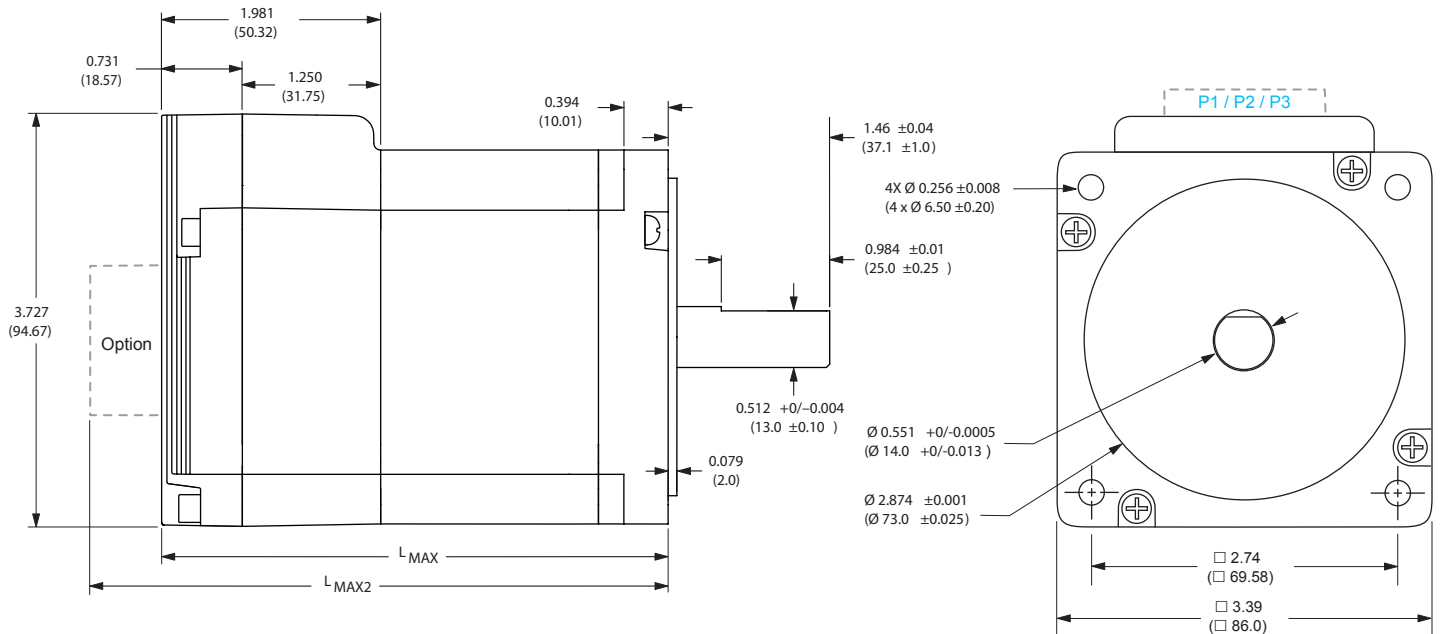

Motor stack length	L _{max}	L _{max2}
Single	3.81 (96.77)	4.52 (114.81)
Double	4.60 (116.84)	5.31 (134.87)
Triple	6.17 (156.72)	6.88 (174.75)

Connector options

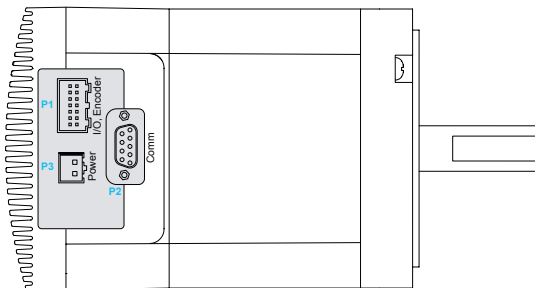

L_{max2} option





Pluggable interface version:
14-pin* and 2-pin locking wire crimp and
DB9 male connectors

* 14-pin replaced by 20-pin locking wire
crimp connector when optional remote
encoder is included


MDrive Plus

MDI•34 CANopen


Accessories

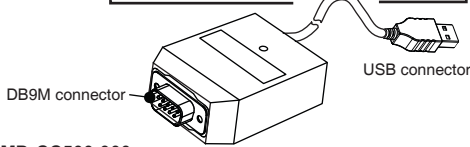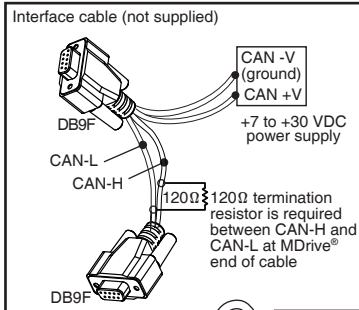

MD-CC500-000



PD14-2334-FL3

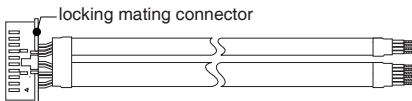

PD20-3400-FL3



PD02-3400-FL3

description	length feet (m)	part number
-------------	-----------------	-------------

Communication converter

Electrically isolated, in-line converter pre-wired with mating connector to conveniently set/program communication parameters for a single MDrive Plus via a PC's USB port.

Interface cable for all CANopen products. Requires mating connector adapter for DB9 connector. Requires power supply, not supplied.	12.0 (3.6)	MD-CC500-000
---	------------	--------------

Prototype development cable

Speed test/development with pre-wired mating connector with other cable end open.

Mates to 14-pin locking wire crimp connector for I/O and internal encoder option	10.0 (3.0)	PD14-2334-FL3
Mates to 20-pin locking wire crimp connector for I/O and remote encoder option	10.0 (3.0)	PD20-3400-FL3
Mates to 2-pin locking wire crimp connector for power	10.0 (3.0)	PD02-3400-FL3

Mating connector kits

Connectors for assembly of cables, cable material not supplied. Sold in lots of 5. Manufacturer's crimp tool recommended for crimp connectors.

14-pin locking wire crimp connector for I/O and internal encoder option	—	CK-09
20-pin locking wire crimp connector for I/O and remote encoder option	—	CK-11
2-pin locking wire crimp connector for power	—	CK-05

Drive protection module


Limits surge current and voltage to a safe level when DC input power is switched on-and-off to an MDrive Plus.

For all MDrive34 CANopen products	—	DPM75
-----------------------------------	---	-------

MDrive Plus

MDI•34 CANopen

MDrive® 34 Plus² IP20 pluggable interface

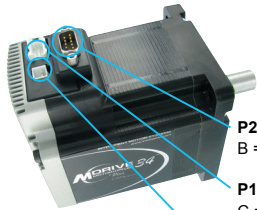

P2: Communication
B = CANopen with DB9 male connector

P1: I/O, and optional remote encoder
C = 14-pin locking wire crimp connector (20-pin with remote encoder option)

P3: Power
2-pin locking wire crimp connector

Part numbers

IP20-rated products

example part number	M	D	I	3	C	C	B	3	4	A	7	-N
MDrivePlus version MDI = Intelligent — CANopen	M	D	I	3	C	C	B	3	4	A	7	-N
Input 3 = Plus ² version with expanded features	M	D	I	3	C	C	B	3	4	A	7	-N
P1 connector C = wire crimp	M	D	I	3	C	C	B	3	4	A	7	-N
Communication type C = CANopen	M	D	I	3	C	C	B	3	4	A	7	-N
P2 connector B = DB9	M	D	I	3	C	C	B	3	4	A	7	-N
Motor size 34 = NEMA 34 3.4" / 85mm	M	D	I	3	C	C	B	3	4	A	7	-N
Motor length A = single stack B = double stack C = triple stack	M	D	I	3	C	C	B	3	4	A	7	-N
Drive voltage 7 = +12 to +75 VDC	M	D	I	3	C	C	B	3	4	A	7	-N
Options — omit from part number if unwanted												-N
-N = rear control knob for manual positioning												-N
-EQ = internal 512-line optical encoder w/ index mark												-N
-EE = remote differential encoder interface; encoder not supplied												-N

MDrive Plus


MDI•34 CANopen

Motor performance


MD•34 NEMA 34 motor specifications	Motor	Stack length	Single	Double	Triple
			Holding torque	oz-in	408
		N-cm	288	405	770
Detent torque	oz-in		10.9	14.16	19.83
	N-cm		7.7	10.0	14.0
Rotor inertia	oz-in-sec ²		0.01275	0.01924	0.03849
	kg-cm ²		0.90	1.35	2.70
Weight (motor+driver)	lb		4.1	5.5	8.8
	kg		1.9	2.5	4.0

MD•34 NEMA 34 speed torque (1)


Single stack length

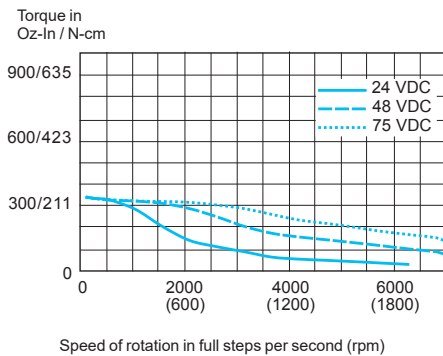

Double stack length

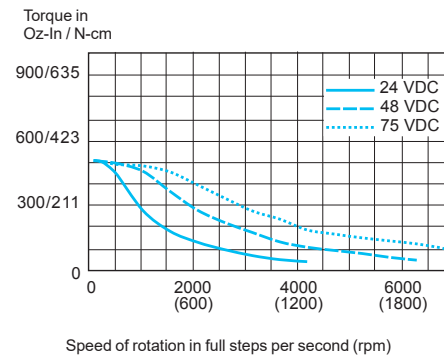

Triple stack length

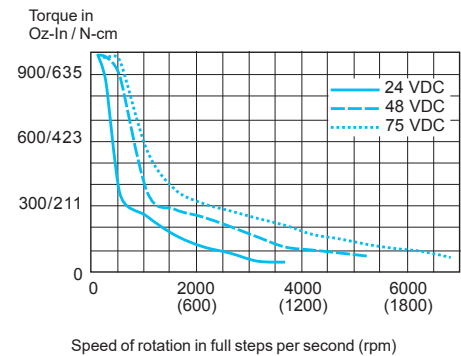

(1) Test conditions: 100% current with damper simulating load.

Novanta IMS

370 North Main Street
 Marlborough, CT 06447
 Phone: (860) 295-6102
 Fax: (860) 295-6107
www.novantaims.com

